
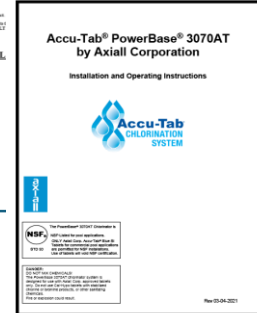



Accu-Tab® PowerBase® Series

PowerBase® 3070AT Installation Kit

Updated 8/1/2024

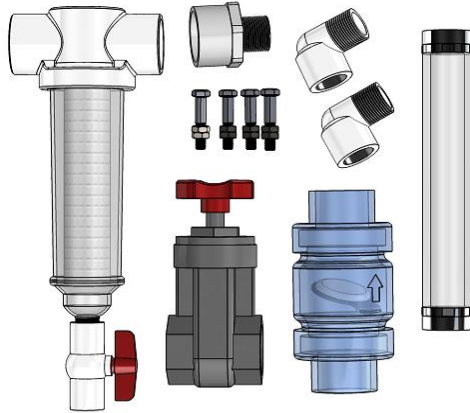

Qty	Description	Part Number
1	1" Inline Flow Meter 2.0-20.0 gpm	FLO-F-41000LN-16
1	1-1/2" PVC Gray, Gate Valve, SOC, EPDM	VLV-GVG-1500-S
1	1 1/2" Spears Clear Flap Check Valve	VLV-S1720C15
1	Rusco 1 1/2" Spin Down 60 Mesh Filter	FSA-1.5-60-F
2	1" PVC-40, 90° Elbow Street MPT x FPT	FIT-412-010
1	1"x 1-1/2" PVC-40, Male Adapter MPT x SOC	FIT-436-133
8	3/8"-16 SS-316 Hex Jam Nut	FAS-77812
4	3/8" x 2" SS Shoulder Bolt	FAS-77111
1	Accu-Tab® PowerBase® 3070A Manual	---
1	Hayward 1.0/1.5 HP Pump Manual	---

**NOTE:** Place 'Installation Kit' sticker on box once box has been sealed.

Verified By: \_\_\_\_\_ Date: \_\_\_\_\_

## **Installation Instructions**

1. Place the chlorination system in a location near the place of application.
2. Level the system. This is important for proper chlorine delivery.
3. Connect the inlet flow meter assembly to the solution tank. The parts were shipped separately to prevent breakage in shipping.
4. Connect the inlet water supply with 1-1/2" PVC pipe or hose. Include an isolation valve in the line.
5. Connect the discharge assembly to the pump using a section of 1-1/2" pipe. (The parts were shipped loose to prevent breakage in shipment.)
6. Connect the discharge piping from the feeder to the chlorine application point with 1-1/2" PVC pipe or hose. Include an isolation valve in the line.
7. Plug the power cord into an 120v receptacle.
8. If a chemical controller is utilized, plug the controller cord into the controller's 120v switched output.

**NOTE: IF A HIGH PRESSURE WEBTROL PUMP IS ORDERED, A LARGER CAPACITY PUMP CONTACTOR IS INSTALLED IN THE ELECTRICAL BOX AND NO CORD/PLUG IS PROVIDED AS A 25 AMP CIRCUIT IS REQUIRED.**

To view the full 3070 Manual, please visit the Resource Center at [www.puraquaproducts.com](http://www.puraquaproducts.com)