

Chlorinators Model 30600



The Accu-Tab® Model 30600 chlorinator is made of rigid PVC. With a tablet charge capacity of 600-lbs., this chlorinator is built to take on demanding sanitizing needs up to 25-lbs./hr. The Accu-Tab Model 30600 is certified to NSF/ANSI/CAN 61 for drinking water. Its proprietary erosion technology has been engineered

to work with Accu-Tab SI three-inch white tablets (Certified to NSF Standard 60) containing 68% available chlorine, to deliver consistent chlorine delivery and low maintenance. In most cases, once a year cleaning is all that is required for this chlorinator.



Certified to
NSF/ANSI/CAN 61

Product Specifications

Model Number	Chlorine Delivery Range (lbs/hr.)	Tablet Capacity (lbs.)	Unit Inlet Size (NFPT)	Unit Outlet Size (NFPT)	Height	Diameter
30600	10-35	600	2"	4"	31"	30"




How the Accu-Tab® System Works



The Accu-Tab® system is easy to install and can be integrated into any existing system with low capital investment. Once in place, the system runs simply and efficiently with little to no maintenance.

1. Accu-Tab three-inch tablets sit on top of a sieve plate inside the chlorinator.
2. Intake water flow to the chlorinator is adjusted to control chlorine delivery.
3. Untreated water rises through holes in the sieve plate contacting with bottom of tablets. The balance of the tablets remain dry.
4. Chlorinated water is returned to the main system flow with the appropriate amount of chlorine.

Chlorinator Delivery Rate **Model 30600**

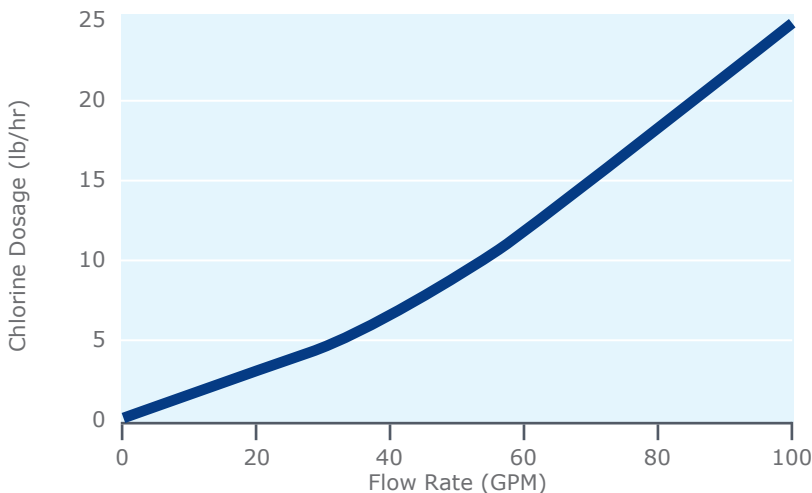

Westlake Water Solutions
 2801 Post Oak Blvd., Suite 600, Houston, TX 77056 USA
www.westlakewatersolutions.com
WTPCustServ@westlake.com

